

Touch 'n Seal[®]

Polyurethane Foam Sealants

New!



***No-Warp Foam –
Proven not to Warp
Window or Door
Frames!***

- Low pressure formula – exerts up to 90% less curing pressure
- Stops air infiltration permanently
- Creates moisture vapor barrier
- Outperforms fiberglass
- Bright white foam
- Cures properly in high / low temperatures and humidity ranges
- No shrink-back
- ASTM E-84 Class 1: flame spread 5, smoke developed 25
- Cures fast – tack free in approximately 10 minutes, trim in approximately 30 minutes
- For professional use – gun applications

YIELD ESTIMATE TABLE		
Size (Volume)	Bead Diameter	Linear Feet
20 oz. can (0.68 cu.ft.)	1/4"	1979
	3/8"	880
	1/2"	495

TECHNICAL DATA

Density: 1.3–1.8 lbs./cu.ft.

Thermal Resistance: (ASTM C-518) R-Value 4.5 per inch thickness

Maximum Service Temperature of Cured Foam: 240°F (116°C)

ASTM E-84, Class 1 Foam: Flame Spread 5, Smoke Developed 25

Shelf Life: 18 months

Solvent-free

No CFC's, No HCFC's

APPROXIMATE DRY TIME		
Humidity % RH	Tack Free	Cut Through*
70%	10	20
50%	12	25
30%	16	33


*Based on minimum time to cut through a cured 1" bead.



Touch 'n Seal® No-Warp Foam is a one-component polyurethane foam specially formulated to be used to seal around window and door frames – providing airtight insulation that blocks drafts, moisture and insects without bowing the frame. It's applied with a gun applicator and can be used under the plate line, at the juncture of the plate line and the slab or foundation, and any penetration through the top or the bottom plate line into a conditioned area. It fills cracks and holes in the exterior sheeting (due to poor application or penetrations made for utility services), at the corner and tee joints in framing, and any other place where air might penetrate the exterior envelope or where the pressure



Touch 'n Seal No-Warp (bright white foam) fills the gap without bowing the frame. Compare to the bowing pressure of standard gun foams (see chart).

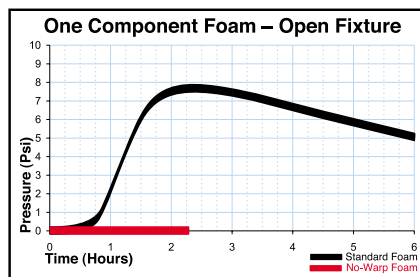

from standard foam products could cause damage.



Also available –

Touch 'n Seal Poly-Clean
Polyurethane Foam Cleaner

- Removes wet foam from hands, tools and foam applicator guns
- New trilingual label (English, Spanish, French)
- Use with foam applicator guns or with applicator tip provided

Product	Product Number	Unit Size	Unit UPC Code	Carton Quantity	Carton Bar Code	Pallet Quantity (Cases)
No-Warp Foam (U.S.)	40045 29712	20 oz.	0 75650 29712 4	12	1 00 75650 29712 1	72
No-Warp Foam (Canada)	40045 29714	20 oz.	0 75650 29714 8	12	1 00 75650 29714 5	72
Poly-Clean (U.S. / Canada)	40047 12022	12 oz.	0 75650 00015 1	12	1 00 75650 00015 8	108



©2002 Convenience Products • 866 Horan Dr. • Fenton, MO 63026-2416
1-800-325-6180 (U.S.) • 1-800-729-8220 (Canada)
An ISO 9002 Registered QA System Company

www.touch-n-seal.com

MIK-005