



P O L Y K E N 217

I N D U S T R I A L T A P E S

POLYKEN® 217

Economy Grade Duct Tape


APPLICATIONS

- Used to seal duct work.
- General purpose packaging and repair.
- Temporary holding.

FEATURES & BENEFITS

- Versatile PE coated cloth duct tape.
- Conforms well to irregular surfaces.
- Adheres well to a wide variety of substrates.
- Tears easily.
- Smooth finish.
- Meets UL 723

CONSTRUCTION

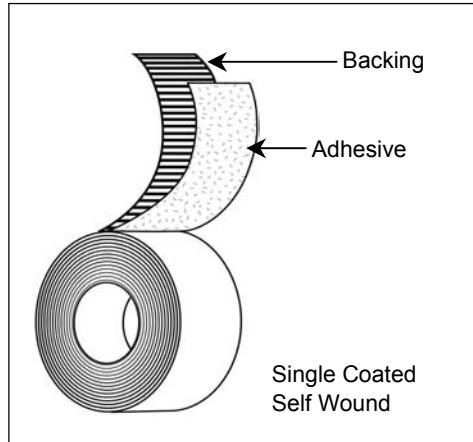

PRODUCT DESCRIPTION

Single-Coated Construction

Backing:

- Polyethylene Coated Cloth

Adhesive:

- Natural Rubber Based

Colors:

- Silver

TEST DATA

Test	Typical Value	Typical Value (Metric)	Test Method
Total Thickness	7 mils	0.178 mm	ASTM D 1000
Adhesion to Steel	32 oz./in.	35.8 g/mm	PSTC-1
Adhesion to Backing	17 oz./in.	19.04 g/mm	PSTC-1
Tensile Strength	22 lb./in.	0.39 kg/mm	ASTM D 1000
Tack (Rolling Ball)	1.5"		
Maximum Performance Temperature	200 F		
Flame Spread	15		UL 723
Smoke Developed	10		UL 723

Typical values are not intended to be used for specification development. Technical data is believed to be true and accurate. We recommend the purchaser test the fitness for use for all applications.

Tyco Adhesives

CORPORATE HEADQUARTERS

1400 PROVIDENCE HWY
NORWOOD, MA 02062
1-800-343-7875

Fax: 1-800-328-4822

www.tycoadhesives.com

A tyco INTERNATIONAL LTD. COMPANY